



更履历史表

版本	变更前内容	变更后内容	编制	审核	变更日期
01	——	初版	林志龙	杨啸威	2022.06.27



905 nm DFB LD TO-CAN(TO56-3pin)-15W

Features:

- Laser wavelength 905 nm
- Suited for short laser pulses from 1 to 100 ns
- Robust TO-can package for high volume applications
- Not released for automotive applications

Applications:

- 3D Sensing, Electronic Equipment, Industrial Automation (Machine Controls, Light Barriers, Vision Controls)

Specifications:

Absolute Maximum Ratings:

Parameter	Symbol	Min.	Max.	Unit
Reverse Voltage	V_r	—	3	V
Forward Current	I_f	—	7	A
Peak output power	P_{opt}	—	20	W
Pulse width (FWHM)	t_p	—	100	ns
Duty cycle	dc	—	0.1	%
Operating Temperature	T_{op}	-40	+85	°C
Storage Temperature	T_{stg}	-40	+100	°C
Lead Solder Temperature	—	—	260	°C
Lead Solder Time	—	—	10	s


Characteristics: ($T_a=25^{\circ}\text{C}$ $I_F = 7\text{ A}$; $t_p = 100\text{ ns}$; $D = 0.01\%$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Threshold Current	I_{th}	—	1	—	A
Optical Output Power	P_{out}	—	15	—	W
Forward Voltage	V_f	—	16	—	V
Peak wavelength	λ_p	895	905	915	nm
Spectral bandwidth (FWHM)	$\Delta\lambda$	—	—	5	nm
Beam divergence (FWHM) parallel to pn-junction	$\theta_{//}$	—	—	10	°
Beam divergence (FWHM) perpendicular to pn-junction	θ_{\perp}	—	—	30	°



Laser aperture (FWHM) parallel to pn-junction	W_{\parallel}	—	40	—	μm
Laser aperture (FWHM) perpendicular to pn-junction	W_{\perp}	—	10	—	μm

Mechanical Dimension and Pin Assignment:

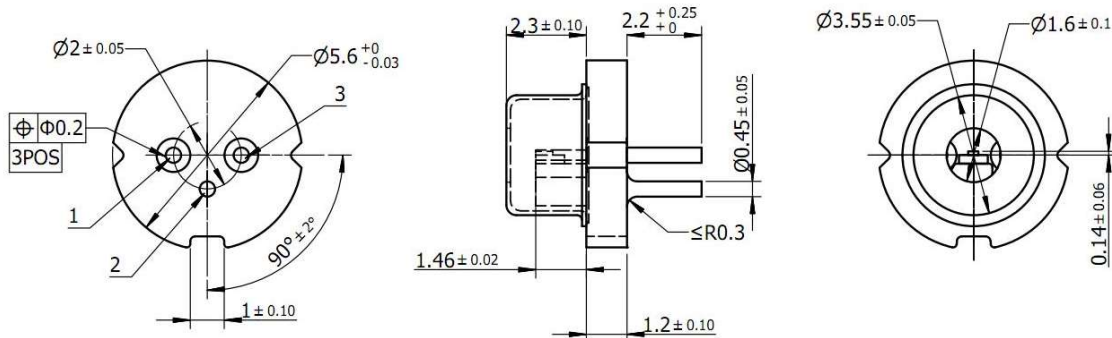

引脚定义: 1.空
2.负电极
3.正电极

Order Information:

LD	DFB	—	□	—	□	—	□	—	□
<u>Emission Wavelength:</u> 905nm		<u>Header Type:</u> TO56		<u>Numbers of Pin:</u> 3pin		<u>Peak output power:</u> 15W			

Product Specification: 5040900300

Statement:

SAN-U owns the authority for final explanation of all information contained in this document, which is subject to change without notice. All the information was obtained in particular environments; and



厦门三优光电股份有限公司

XIAMEN SAN-U OPTRONICS CO., LTD.

文件编号: SU-01-19-A-07-A61A

版本: 01

实施日期: 2022.06.27

第 4 页 共 4 页

SAN-U will not be responsible for the performance of the customers' actual operating environments. All information contained is only for the users' reference and shall not be considered as warranted characteristics. SAN-U will not be liable for damages arising directly or indirectly which from any use of the information contained in this document.

Contact Information:

Address: N501-505 Weiye Bldg., Xiamen Pioneering Park For Overseas Chinese Scholars, Xiamen, Fujian, China

Tel: +86-592-3898601, 3898608, 5318000

Fax: +86-592-5703588

Email: sales@san-u.com

<http://www.san-u.com>